


CIS - Semiconductors Lighting Center

TECHNICAL SHEET LED Luminary – GEMMA 4M

Code	RS81860
Application	Halls, Industry, outdoor
Operating voltage	230 V ~
Mains frequency	50 Hz
Power consumption	40 W ± 10 %
Power Factor (λ)	> 0,94
Insulation class	II
Luminous Flux	min. 4700 lm
Color temperature (CCT)	6400 K
Color rendering index (CRI)	> 80
Optical / material	Opaque diffuser
Ingress protection	IP65
Mechanical Shock	IK10
Operating temperature range	-25 °C...+45 °C
Weight	3,2 Kg
Dimensions (L x W x H)	1227 x 119 x 75 mm

Shape and dimension:

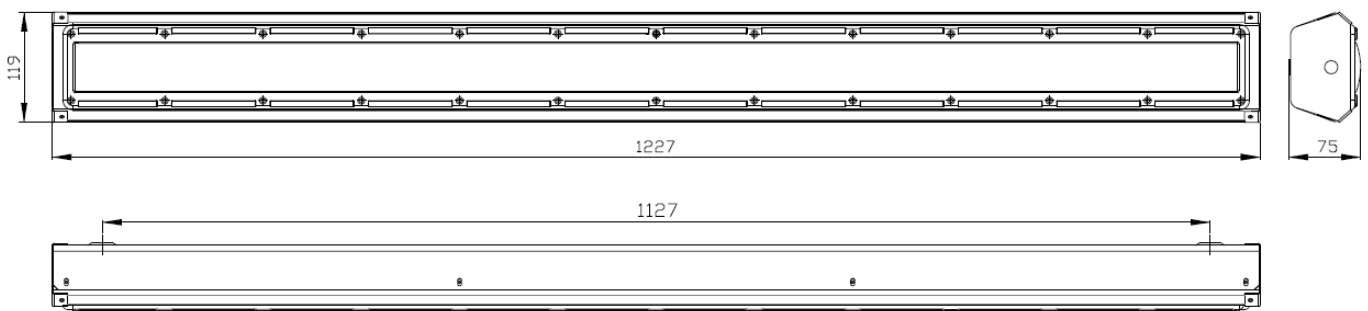

Applicable standards:

SR EN 60598-1:2009+A11:2009
 SR EN 60598-2-1:2001
 SR EN 62031:2009
 SR EN 55015:2007+A1:2008+A2:2009
 SR EN 61000-3-2:2006+A1:2010+A2:2010
 SR EN 61000-3-3:2009
 SR EN 61547:2010